

Product Information

Electric/Industrial




PU 8593

FEATURES

- Aliphatic elastomer
- Optical transparency
- UV stable
- Hardness 90 Shore A

COMPOSITION

- Polyol PU8593 A
- Isocyanate PU8593 B

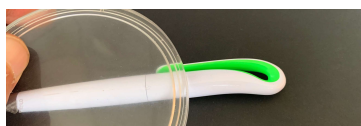

PU8593 is a flexible aliphatic polyurethane system 90 Shore A hardness, characterized by excellent optical transparency and UV stability, high tear resistance.

APPLICATIONS

- Designed for electrical applications, parts and protections resistant to abrasion.

TYPICAL PROPERTIES

This data does not constitute the Product Sales Specifications. The values indicated refer to typical properties and are not to be understood as extreme minimum or maximum values. They do not constitute a guarantee of product conformity and do not relieve the buyer from the need to test the suitability of the products before use or placing them in his production cycle. Please contact your local sales representative to obtain the product specifications.

Property	Unit	Value
Colour (Part A/Part B)	visual	Colorless/colorless
Density at 23°C (Part A/Part B)	g/cm ³	1.00/1.07
Viscosity at 23°C (Part A/Part B)	mPa.s	1500/25
Mix ratio	pbw	100 : 60
Pot life [150g at 23°C]	minutes	15
Gel time [150g at 23°C]	minutes	20
Demoulding at 23°C	hours	24
Polymer appearance	visual	transparent colorless
Hardness	Shore	90 A
Tensile strength	MPa	36.7
Elongation at break	%	540
Tear strength	kN/m	119
Linear shrinkage [500x50x10mm]	%	0.1

HOW TO USE

Open both containers A and B and examine the components; if they show signs of crystallization, place them in an oven at 50-60°C until the crystals are completely melted. Mix Part A (polyol) before each withdrawal from the container. The two components must be processed at a temperature between +20 and +30°C.

MIXING

Mix the two components in the correct mixing ratio, at low speed, avoiding the inclusion of air and make sure that the material on the sides and bottom of the container is well mixed. Pour into a new container and repeat mixing. To eliminate air bubbles, we recommend

vacuum degassing the mixture before and after casting.

CURING

The product can generally be processed within the times indicated above. The hardening time depends on the mass: thinner thicknesses require longer curing times. A high temperature of the product or of the environment lead to reductions in workability and hardening times. Contrariwise, low temperatures mean longer times. In the presence of thin thicknesses, we recommend heating the mold to 50-60°C. The polymer, in particular in the presence of thin thicknesses, can present surface stickiness. In this case we recommend a post-curing treatment at 60°C.

HANDLING PRECAUTIONS

The information for a correct and safe handling of the products are contained in the safety data sheet. Consult the safety data sheets before use for complete information on the risks for health and environment and for suitable protective devices to be adopted. Share the safety data sheets with all the staff involved in the use of the products.

USABLE LIFE - STORAGE

Polyol and isocyanate must be stored in the original unopened containers at a temperature between +10°C and +35°C. Isocyanates can crystallize at low temperatures. Bring the components to 20-25°C before use. The two components are sensitive to humidity. Be sure to close containers tightly after use.

Polyol and isocyanate, if stored in the specified conditions, have a shelf life of 6 months from the date of manufacture.

PACKAGING

The components are supplied in 25 liter cans, 200 liter drums or 1000 liter tanks. For other packaging please contact our sales department.

LIMITATIONS

This product is neither tested nor represented as suitable for food contact, skin contact or medical uses.

LIMITED WARRANTY

The information contained in this document is offered in good faith based on Chemix research and is believed to be accurate. However, as the conditions and methods of use of our products are beyond our control, this information should not be used as a substitute for the tests that customers must first perform to ensure that Chemix products are fully satisfactory for their specific applications. The warranty is only applicable to the values indicated in the Product Sales Specifications. The sole and exclusive compensation for products with values that are out of specification is limited to the replacement of the product or the refund of the purchase price.

Chemix disclaims any other explicit or implicit guarantee referring to the suitability of the Products in specific user's applications.

Chemix disclaims any liability for incidental or consequential damages resulting from the use of the Product.

www.chemix.it

Chemix Srl Via Berlinguer 8, 21010 Golasecca (Italy). Phone +39(0)331959373 info@chemix.it